



## **SPECIFICATION**

# **AGM-12864C-601**

**CUSTOMER   :** \_\_\_\_\_

**MODULE NO.:**           **AGM-12864C-601**          

**APPROVED BY:**

( FOR CUSTOMER USE ONLY )

**PCB VERSION:   DATA:**

SALES BY	APPROVED BY	CHECKED BY	PREPARED BY

VERSION	DATE	REVISED PAGE NO.	SUMMARY
0	2009/5/6		First issue

RECORDS OF REVISION			DOC. FIRST ISSUE
VERSION	DATE	REVISED PAGE NO.	<b>SUMMARY</b>
0	2009/5/6		First issue

# **Contents**

1. Blank Page
2. Precautions in use of LCD Modules
3. General Specification
4. Absolute Maximum Ratings
5. Electrical Characteristics
6. Optical Characteristics
7. Interface Pin Function
8. Contour Drawing & Block Diagram
9. Timing Characteristics
10. Reliability
11. Backlight Information
12. Inspection specification
13. Material List of Components for RoHs

# 1. Blank Page

## **2. Precautions in use of LCD Modules**

- (1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
- (2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD module.
- (3) Don't disassemble the LCM.
- (4) Don't operate it above the absolute maximum rating.
- (5) Don't drop, bend or twist LCM.
- (6) Soldering: only to the I/O terminals.
- (7) Storage: please storage in anti-static electricity container and clean environment.
- (8). AGTechnologies have the right to change the passive components
- (9). AGTechnologies have the right to change the PCB Rev.

## **3. General Specification**

Item	Dimension	Unit
Number of Characters	128 x 64 dots	Ė
Module dimension	55.2x 39.8 x 6.5(MAX)	mm
View area	45.2 x 27.0	mm
Active area	40.92 x 24.28	mm
Dot size	0.28 x 0.34	mm
Dot pitch	0.32 x 0.38	mm
LCD type	FSTN Positive Transflective (In LCD production, It will occur slightly color difference. We can only guarantee the same color in the same batch.)	
Duty	1/64 , 1/9 Bias	
View direction	6 o'clock	
Backlight Type	LED, Yellow Green	

## 4. Absolute Maximum Ratings

Item	Symbol	Min	Typ	Max	Unit
Operating Temperature	$T_{OP}$	-20	$\ddot{E}$	+70	$\text{K}$
Storage Temperature	$T_{ST}$	-30	$\ddot{E}$	+80	$\text{K}$
Input Voltage	$V_I$	-0.3	$\ddot{E}$	$V_{DD}+0.3$	V
Supply Voltage For Logic	$V_{DD}-V_{SS}$	-0.3		5.0	V
LCD Driver Supply Voltage	$V_{OUT}$	4		13	V

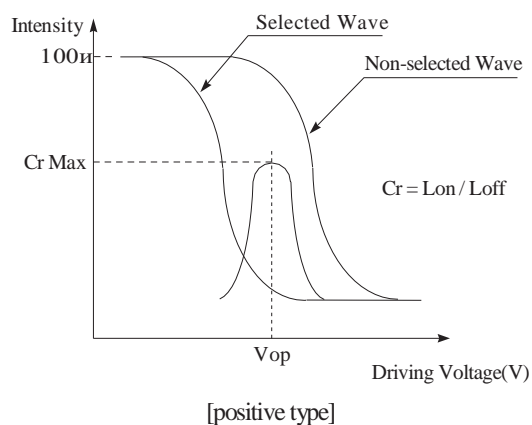
## 5. Electrical Characteristics

Item	Symbol	Condition	Min	Typ	Max	Unit
Supply Voltage For Logic	$V_{DD}-V_{SS}$	$\ddot{E}$	2.7	3.0	3.3	V
Supply Voltage For LCM	$V_{DD}-V_S$	$T_a=-20\text{K}$	9.1	9.3	9.5	V
		$T_a=25\text{K}$	8.8	9.0	9.2	V
		$T_a=70\text{K}$	8.6	8.8	9.0	V
Input High Volt.	$V_{IH}$	$\ddot{E}$	$0.8 V_{DD}$	$\ddot{E}$	$V_{DD}$	V
Input Low Volt.	$V_{IL}$	$\ddot{E}$	$V_{SS}$	$\ddot{E}$	$0.2 V_{DD}$	V
Output High Volt.	$V_{OH}$	$\ddot{E}$	$0.8 V_{DD}$	$\ddot{E}$	$V_{DD}$	V
Output Low Volt.	$V_{OL}$	$\ddot{E}$	$V_{SS}$	$\ddot{E}$	$0.2V_{DD}$	V
Supply Current(No include LED Backlight)	$I_{DD}$	$V_{DD}=3.0V$		0.49	1	mA

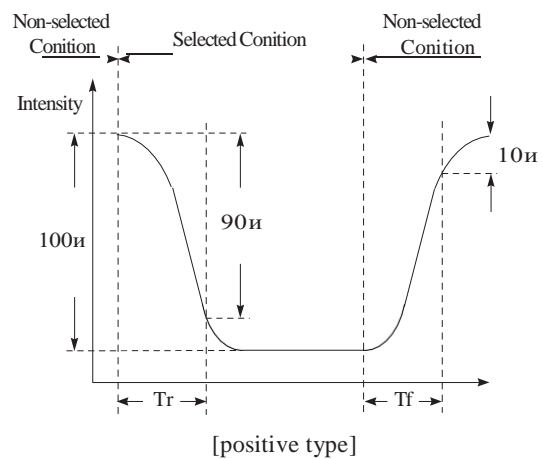
## **6. Optical Characteristics**

Item	Symbol	Condition	Min	Typ	Max	Unit
View Angle	(V) $\ddot{Y}$	CRH2	30	$\ddot{E}$	60	deg
	(H) $\mathfrak{X}$	CRH2	-45	$\ddot{E}$	45	deg
Contrast Ratio	CR	$\ddot{E}$	$\ddot{E}$	5	$\ddot{E}$	$\ddot{E}$
Response Time	T rise	$\ddot{E}$	$\ddot{E}$	230	330	ms
	T fall	$\ddot{E}$	$\ddot{E}$	170	270	ms

### Definition of Operation Voltage ( $V_{op}$ )



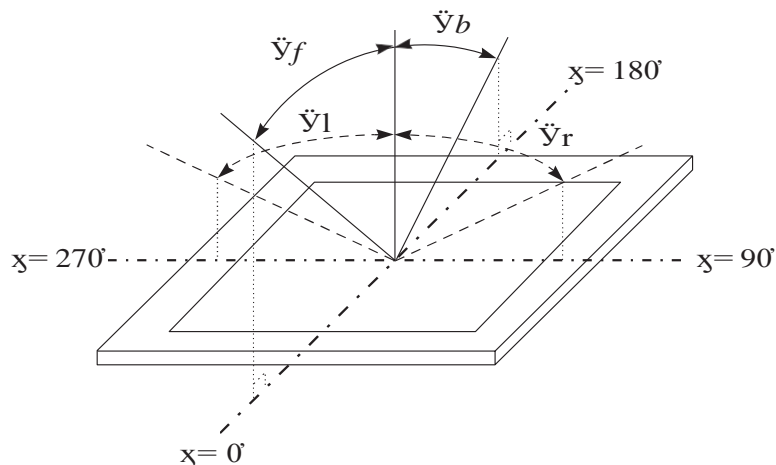
### Definition of Response Time ( $T_r$ , $T_f$ )



### Conditions :

Operating Voltage : Vop	Viewing Angle( $\Delta\theta$ ) : 0°- 0°
Frame Frequency : 64 HZ	Driving Waveform : 1/N duty , 1/a bias

### Definition of viewing angle(CRH2)





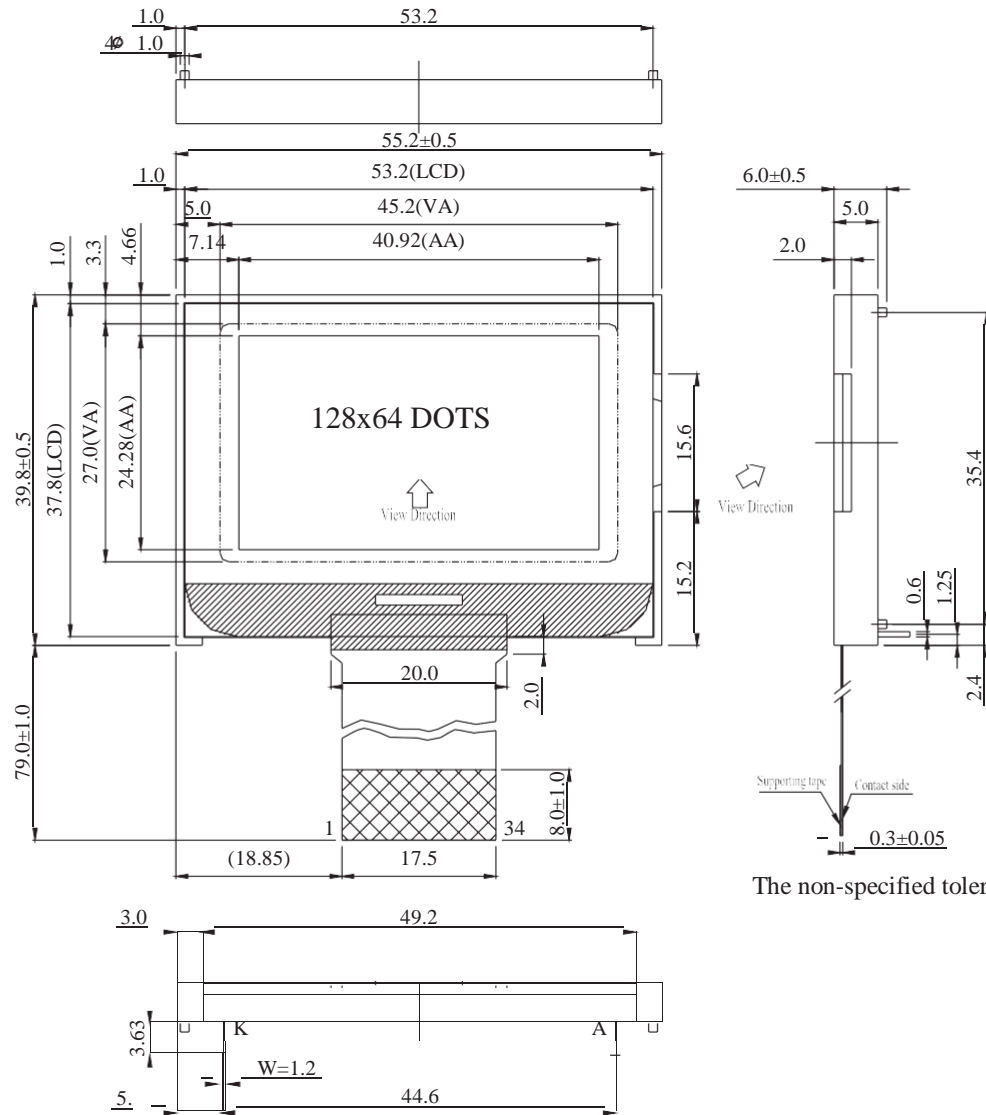
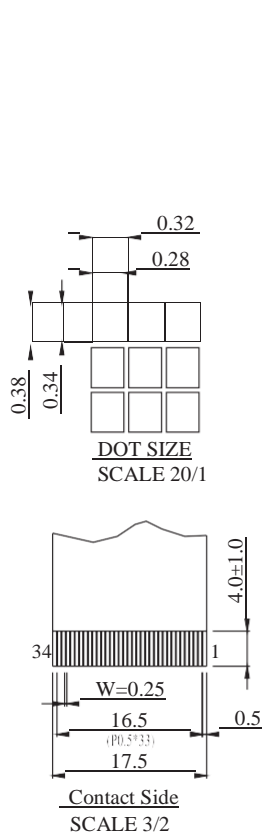
## 7. Interface Pin Function

Pin No.	Symbol	Level	Description															
1	IRS		This terminal selects the resistors for the V5 voltage level adjustment. IRS = “H”: Use the internal resistors. IRS = “L”: Do not use the internal resistors. The V5 voltage level is regulated by an external resistive voltage divider attached to the VR terminal. This pin is enabled only when the master operation mode is selected. It is fixed to either “H”or “L” when the slave operation mode is selected.															
2	/HPM		This is the power control terminal for the power supply circuit for liquid crystal drive. HPM=”H”:Normal made HPM=”L”:High power mod															
3	P/S		This is the parallel data input/serial data input switch terminal. P/S = “H”: Parallel data input. P/S = “L”: Serial data input. The following applies depending on the PS status: <table border="1"><tr><th>P/S</th><th>Data/Command</th><th>Data</th><th>Read/Write</th><th>Serial Clock</th></tr><tr><td>“H”</td><td>A0</td><td>DB0 ~ DB7</td><td>/RD, /WR</td><td>X</td></tr><tr><td>“L”</td><td>A0</td><td>SI (DB7)</td><td>Write only</td><td>SCL (DB6)</td></tr></table> When P/S = “L”, DB0 to DB5 fixed “H”. /RD (EP) and /WR (RWP) are fixed to either “H” or “L”. With serial data input, It is impossible read data from RAM .	P/S	Data/Command	Data	Read/Write	Serial Clock	“H”	A0	DB0 ~ DB7	/RD, /WR	X	“L”	A0	SI (DB7)	Write only	SCL (DB6)
P/S	Data/Command	Data	Read/Write	Serial Clock														
“H”	A0	DB0 ~ DB7	/RD, /WR	X														
“L”	A0	SI (DB7)	Write only	SCL (DB6)														
4	C86		This is the MPU interface switch terminal. C86 = “H”: 6800 Series MPU interface. C86 = “L”: 8080 MPU interface.															
5	VR		Output voltage regulator terminal. Provides the voltage between VDD and V5 through a resistive voltage divider. These are only enabled when the V5 voltage regulator internal resistors are not used (IRS = “L”). These cannot be used when the V5 voltage regulator internal resistors are used (IRS = “H”).															
6	V0		This is a multi-level power supply for the liquid crystal drive. The voltage Supply applied is determined by the liquid crystal cell, and is changed through the use of a resistive voltage divided or through changing the impedance using an op. amp. Voltage levels are determined based on Vss, and must maintain the relative magnitudes shown below.															
7	V1																	
8	V2																	
9	V3																	

10	V4		<div>V0 HV1 HV2 HV3 HV4 HVss</div> <div>When the power supply turns ON, the internal power supply circuits produce the V1 to V4 voltages shown below. The voltage settings are selected using the LCD bias set command.</div> <table><tr><td></td><td>1/65 DUTY</td><td>1/49 DUTY</td><td>1/33 DUTY</td><td>1/55 DUTY</td><td>1/53 DUTY</td></tr><tr><td>V1</td><td>8/9*V0,6/7*V0</td><td>7/8*V0,5/6*V0</td><td>5/6*V0,4/5*V0</td><td>7/8*V0,5/6*V0</td><td>7/8*V0,5/6*V0</td></tr><tr><td>V2</td><td>7/9*V0,5/7*V0</td><td>6/8*V0,4/6*V0</td><td>4/6*V0,3/5*V0</td><td>6/8*V0,4/6*V0</td><td>6/8*V0,4/6*V0</td></tr><tr><td>V3</td><td>2/9*V0,2/7*V0</td><td>2/8*V0,2/6*V0</td><td>2/6*V0,2/5*V0</td><td>2/8*V0,2/6*V0</td><td>2/8*V0,2/6*V0</td></tr><tr><td>V4</td><td>1/9*V0,1/7*V0</td><td>1/8*V0,1/6*V0</td><td>1/6*V0,1/5*V0</td><td>1/8*V0,1/6*V0</td><td>1/8*V0,1/6*V0</td></tr></table>		1/65 DUTY	1/49 DUTY	1/33 DUTY	1/55 DUTY	1/53 DUTY	V1	8/9*V0,6/7*V0	7/8*V0,5/6*V0	5/6*V0,4/5*V0	7/8*V0,5/6*V0	7/8*V0,5/6*V0	V2	7/9*V0,5/7*V0	6/8*V0,4/6*V0	4/6*V0,3/5*V0	6/8*V0,4/6*V0	6/8*V0,4/6*V0	V3	2/9*V0,2/7*V0	2/8*V0,2/6*V0	2/6*V0,2/5*V0	2/8*V0,2/6*V0	2/8*V0,2/6*V0	V4	1/9*V0,1/7*V0	1/8*V0,1/6*V0	1/6*V0,1/5*V0	1/8*V0,1/6*V0	1/8*V0,1/6*V0
	1/65 DUTY	1/49 DUTY	1/33 DUTY	1/55 DUTY	1/53 DUTY																												
V1	8/9*V0,6/7*V0	7/8*V0,5/6*V0	5/6*V0,4/5*V0	7/8*V0,5/6*V0	7/8*V0,5/6*V0																												
V2	7/9*V0,5/7*V0	6/8*V0,4/6*V0	4/6*V0,3/5*V0	6/8*V0,4/6*V0	6/8*V0,4/6*V0																												
V3	2/9*V0,2/7*V0	2/8*V0,2/6*V0	2/6*V0,2/5*V0	2/8*V0,2/6*V0	2/8*V0,2/6*V0																												
V4	1/9*V0,1/7*V0	1/8*V0,1/6*V0	1/6*V0,1/5*V0	1/8*V0,1/6*V0	1/8*V0,1/6*V0																												
11	VRS		This is the internal-input VREG power supply for the lcd power supply																														
12	CAP4+		DC/DC voltage converter. Connect a capacitor between this terminal and the CAP2- terminal.																														
13	CAP2-		DC/DC voltage converter. Connect a capacitor between this terminal and the CAP2+ terminal.																														
14	CAP2+		DC/DC voltage converter. Connect a capacitor between this terminal and the CAP2- terminal.																														
15	CAP1+		DC/DC voltage converter. Connect a capacitor between this terminal and the CAP1- terminal.																														
16	CAP1-		DC/DC voltage converter. Connect a capacitor between this terminal and the CAP1+ terminal.																														
17	CAP3+		DC/DC voltage converter. Connect a capacitor between this terminal and the CAP1- terminal																														
18	CAP5+		DC/DC voltage converter. Connect a capacitor between this terminal and the CAP1- terminal.																														
19	VOUT		DC/DC voltage converter. Connect a capacitor between this terminal and VSS																														
20	Vss		Power Supply (VSS=0)																														
21	VDD		Power Supply (VDD=3.0)																														
22	DB7		<div>This is an 8-bit bi-directional data bus that connects to an 8-bit or 16-bit standard MPU data bus.</div> <div>When the serial interface is selected (PS = “L”), DB7 serves as the serial data input terminal (SI) and DB6 serves as the serial clock input terminal (SCL).</div> <div>At the same time, DB5 - 0 are set to high impedance.</div> <div>When the chip select is inactive, DB0 to DB7 are set to high impedance.</div>																														
23	DB6																																
24	DB5																																
25	DB4																																
26	DB3																																
27	DB2																																
28	DB1																																
29	DB0																																
30	/RD(E)		<div>When connected to an 8080 MPU, this is LOW active.</div> <div>This pin is connected to the RD signal of the 8080 MPU, and the ST7565P series data bus is in an output status when this signal is “L”. When connected to a 6800 Series MPU , this is active HIGH.</div> <div>This is the 6800 Serier MPU enable clock input terminal.</div>																														

31	/WR(RW)		<p>When connected to an 8080 MPU, this is LOW active. This pin is connected to the RD signal of the 8080 MPU, and the ST7565P series data bus is in an output status when this signal is “L”.</p> <p>When connected to a 6800 Series MPU , this is active HIGH. This is the 6800 Serier MPU enable clock input terminal.</p>
32	A0		<p>This is connect to the least significant bit of the normal MPU address bus, and it determines whether the data bits are data or a command.</p> <p>A0 = “H”: Indicates that DB0 to DB7 are display data.</p> <p>A0 = “L”: Indicates that DB0 to DB7 are control data.</p>
33	/RES		<p>/RES is set to “L”, the settings are initialized.</p> <p>The /RES signal level performs the reset operation.</p>
34	/CS1		<p>This is the chip select signal. When /CS1 = “L”, then the chip select becomes active, and data/command I/O is enabled.</p>

## 8. Contour Drawing & Block Diagram



PIN NO.	SIGNAL	PIN NO.	SIGNAL
1	IRS	18	CAP5'
2	/HPM	19	VOUT
3	P/S	20	V <sub>SS</sub>
4	C86	21	VDD
5	VR	22	D7
6	V>	23	D6
7	V^	24	D5
8	Vv	25	D4
9	V^	26	D3
10	V~	27	D2
11	VRS	28	D1
12	CAP4'	29	D0
13	CAP2 <sup>?</sup>	30	/RD(E)
14	CAP2'	31	/WR(R/W)
15	CAP1+	32	A0
16	CAP1 <sup>?</sup>	33	/RES
17	CAP3'	34	/CS1

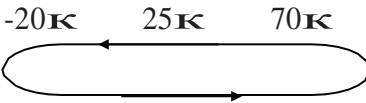
The non-specified tolerance of dimension is 0.2mm.

## **9. Timing Characteristics**

**Please consult the spec of Sitronix ST7565P**

# 10. Reliability

Content of Reliability Test (wide temperature, -20K~70K)

Environmental Test			
Test Item	Content of Test	Test Condition	Note
High Temperature storage	Endurance test applying the high storage temperature for a long time.	80K 200hrs	2
Low Temperature storage	Endurance test applying the high storage temperature for a long time.	-30K 200hrs	1,2
High Temperature Operation	Endurance test applying the electric stress (Voltage & Current) and the thermal stress to the element for a long time.	70K 200hrs	—
Low Temperature Operation	Endurance test applying the electric stress under low temperature for a long time.	-20K 200hrs	1
High Temperature/ Humidity Operation	The module should be allowed to stand at 60 K,90%RH max For 96hrs under no-load condition excluding the polarizer, Then taking it out and drying it at normal temperature.	60K,90%RH 96hrs	1,2
Thermal shock resistance	The sample should be allowed stand the following 10 cycles of operation <div style="text-align: center;">  <p>-20K      25K      70K</p> <p>30min    5min    30min</p> <p>1 cycle</p> </div>	-20K/70K 10 cycles	—
Vibration test	Endurance test applying the vibration during transportation and using.	Total fixed amplitude : 1.5mm Vibration Frequency : 10~55Hz One cycle 60 seconds to 3 directions of X,Y,Z for Each 15 minutes	3
Static electricity test	Endurance test applying the electric stress to the terminal.	VS=800V,RS=1.5k Θ CS=100pF 1 time	—

**Note1: No dew condensation to be observed.**

**Note2: The function test shall be conducted after 4 hours storage at the normal Temperature and humidity after remove from the test chamber.**

**Note3: Vibration test will be conducted to the product itself without putting it in a container.**

# **11. Backlight Information**

## **Specification**

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	TEST CONDITION
Supply Current	I <sub>LED</sub>	43.2	48	75	mA	V=3.5V
Supply Voltage	V	3.4	3.5	3.6	V	
Reverse Voltage	V <sub>R</sub>	Ë	Ë	5	V	Ë
Luminous Intensity	I <sub>V</sub>	15	18.75	Ë	CD/M <sup>2</sup>	I <sub>LED</sub> =48mA
LED Life Time	Ë	Ë	50K	Ë	Hr.	I <sub>LED</sub> ½48mA
Color	Yellow Green					

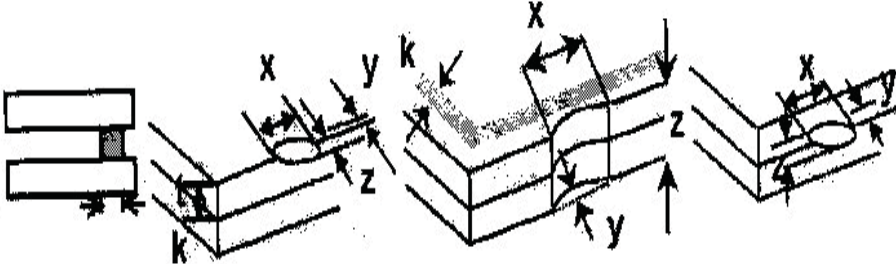









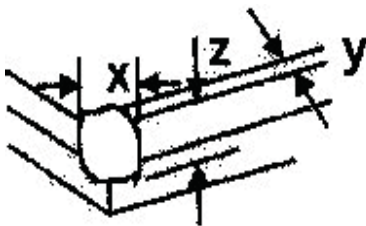




























**Note:** The LED of B/L is drive by current only **I** driving voltage is only for reference  
To make driving current in safety area (waste current between minimum and maximum).

**Note1 :**50K hours is only an estimate for reference.


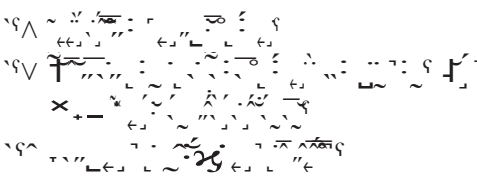
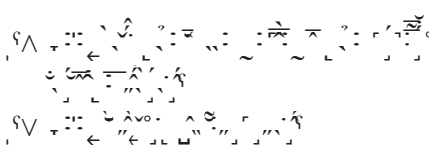

































# 12. Inspection specification













NO	Item	Criterion	AQL														
01	Electrical Testing	1.1 Missing vertical, horizontal segment, segment contrast defect. 1.2 Missing character , dot or icon. 1.3 Display malfunction. 1.4 No function or no display. 1.5 Current consumption exceeds product specifications. 1.6 LCD viewing angle defect. 1.7 Mixed product types. 1.8 Contrast defect.	0.65														
02	Black or white spots on LCD (display only)	2.1 White and black spots on display ≤0.25mm, no more than three white or black spots present. 2.2 Densely spaced: No more than two spots or lines within 3mm	2.5														
03	LCD black spots, white spots, contamination (non-display)	3.1 Round type : As following drawing <div><div>й: " " ' ' &lt; v</div><div><div>X</div><div><div><div></div><div></div></div><div>Y</div></div></div></div> <table><tr><td>1~</td><td>~</td></tr><tr><td>йЛБ&gt;^&gt;</td><td>~</td></tr><tr><td>&gt;^&gt;йЛБ&gt;^&gt;</td><td>v</td></tr><tr><td>&gt;^&gt;йЛБ&gt;^&gt;</td><td>^</td></tr><tr><td>&gt;^&gt;'йЛБ</td><td>&gt;</td></tr></table>	1~	~	йЛБ>^>	~	>^>йЛБ>^>	v	>^>йЛБ>^>	^	>^>'йЛБ	>	2.5				
		1~	~														
йЛБ>^>	~																
>^>йЛБ>^>	v																
>^>йЛБ>^>	^																
>^>'йЛБ	>																
		3.2 Line type : (As following drawing) <div><div><div></div><div>L</div><div>W</div></div><table><tr><th>Length</th><th>Width</th><th>Acceptable Q TY</th></tr><tr><td>---</td><td>WЛБ&gt;^&gt;</td><td>Accept no dense</td></tr><tr><td>ЛБ^&gt;</td><td>0.02 ЛБ&gt;^&gt;</td><td rowspan="2">2</td></tr><tr><td>ЛБv^'</td><td>0.03 ЛБ&gt;^&gt;</td></tr><tr><td>---</td><td>0.05 ЛБ</td><td>As round type</td></tr></table></div>	Length	Width	Acceptable Q TY	---	WЛБ>^>	Accept no dense	ЛБ^>	0.02 ЛБ>^>	2	ЛБv^'	0.03 ЛБ>^>	---	0.05 ЛБ	As round type	2.5
Length	Width	Acceptable Q TY															
---	WЛБ>^>	Accept no dense															
ЛБ^>	0.02 ЛБ>^>	2															
ЛБv^'	0.03 ЛБ>^>																
---	0.05 ЛБ	As round type															
04	Polarizer bubbles	If bubbles are visible, judge using black spot specifications, not easy to find, must check in specify direction. <table><tr><th>Size й</th><th>Acceptable Q TY</th></tr><tr><td>йЛБ&gt;^&gt;</td><td>Accept no dense</td></tr><tr><td>&gt;^&gt;йЛБ&gt;^&gt;</td><td>3</td></tr><tr><td>&gt;^&gt;йЛБ^&gt;&gt;</td><td>2</td></tr><tr><td>^&gt;&gt;йЛБ</td><td>0</td></tr><tr><td>Total Q TY</td><td>3</td></tr></table>	Size й	Acceptable Q TY	йЛБ>^>	Accept no dense	>^>йЛБ>^>	3	>^>йЛБ^>>	2	^>>йЛБ	0	Total Q TY	3	2.5		
Size й	Acceptable Q TY																
йЛБ>^>	Accept no dense																
>^>йЛБ>^>	3																
>^>йЛБ^>>	2																
^>>йЛБ	0																
Total Q TY	3																



NO	Item	Criterion	AQL																		
05	Scratches	Follow NO.3 LCD black spots, white spots, contamination																			
06	Chipped glass	<p>Symbols Define: x: Chip length                      y: Chip width                      z: Chip thickness k: Seal width                      t: Glass thickness                      a: LCD side length L: Electrode pad length:</p> <p>6.1 General glass chip : 6.1.1 Chip on panel surface and crack between panels:</p> <div></div> <table border="1" data-bbox="418 945 1315 1137"><tr><td></td><td></td><td></td></tr><tr><td><math>\text{Chip} \wedge &lt; \vee</math></td><td></td><td><math>\text{Chip} \wedge &lt; \vee</math></td></tr><tr><td><math>\wedge &lt; \vee \text{Chip} \vee</math></td><td></td><td><math>\text{Chip} \wedge &lt; \vee</math></td></tr></table> <p><math>\Phi</math>  <math>\vee</math>  <math>\wedge</math> </p> <p><math>\text{Chip} \wedge &lt; \vee</math> </p> <div></div> <table border="1" data-bbox="418 1527 1315 1720"><tr><td></td><td></td><td></td></tr><tr><td><math>\text{Chip} \wedge &lt; \vee</math></td><td></td><td><math>\text{Chip} \wedge &lt; \vee</math></td></tr><tr><td><math>\wedge &lt; \vee \text{Chip} \vee</math></td><td></td><td><math>\text{Chip} \wedge &lt; \vee</math></td></tr></table> <p><math>\Phi</math>  <math>\vee</math>  <math>\wedge</math> </p>				$\text{Chip} \wedge < \vee$		$\text{Chip} \wedge < \vee$	$\wedge < \vee \text{Chip} \vee$		$\text{Chip} \wedge < \vee$				$\text{Chip} \wedge < \vee$		$\text{Chip} \wedge < \vee$	$\wedge < \vee \text{Chip} \vee$		$\text{Chip} \wedge < \vee$	2.5
																					
$\text{Chip} \wedge < \vee$		$\text{Chip} \wedge < \vee$																			
$\wedge < \vee \text{Chip} \vee$		$\text{Chip} \wedge < \vee$																			
																					
$\text{Chip} \wedge < \vee$		$\text{Chip} \wedge < \vee$																			
$\wedge < \vee \text{Chip} \vee$		$\text{Chip} \wedge < \vee$																			



NO	Item	Criterion	AQL
07	Cracked glass		2.5
08	Backlight elements		0.65 2.5 0.65
09	Bezel		2.5 0.65
10	PCBECOB	<p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p> <p>  </p>	2.5 2.5 0.65 2.5 2.5 0.65 0.65 2.5 2.5
11	Soldering		2.5 2.5 2.5 0.65

NO	Item	Criterion	AQL
12	General appearance		2.5
			0.65
			2.5
			2.5
			2.5
			2.5
			2.5
			0.65
			0.65
			0.65
			0.65
			0.65

# **13. Material List of Components for RoHs**

1. AGTechnologies Ltda. hereby declares that all of or part of products (with the mark “#”in code), including, but not limited to, the LCM, accessories or packages, manufactured and/or delivered to your company (including your subsidiaries and affiliated company) directly or indirectly by our company (including our subsidiaries or affiliated companies) do not intentionally contain any of the substances listed in all applicable EU directives and regulations, including the following substances.

Exhibit AKThe Harmful Material List

Material	(Cd)	(Pb)	(Hg)	(Cr6+)	PBBs	PBDEs
Limited Value	100 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm	1000 ppm
Above limited value is set up according to RoHS.						

## 2.Process for RoHS requirementK

(1) Use the Sn/Ag/Cu soldering surface ■ the surface of Pb-free solder is rougher than we used before.

(2) Heat-resistance temp.K

ReflowK250K,30 seconds Max. ■

Connector soldering wave or hand solderingK320K, 10 seconds max.

(3) Temp. curve of reflow, max. Temp.K235±5K ■

Recommended customer’s soldering temp. of connectorK280K, 3 seconds.