



**AG**Technologies  
LCD Displays

# **SPECIFICATION**

# **AGO-101S0-NN-N**

## Record of Revision

| Version    | Revise Date | Page | Content         |
|------------|-------------|------|-----------------|
| Pre-spec.A | 2015/06/16  |      | Initial Release |

# Contents

|        |                                          |    |
|--------|------------------------------------------|----|
| 1.     | General Specifications .....             | 4  |
| 2.     | Pin Assignment .....                     | 5  |
| 3.     | Operation Specifications.....            | 8  |
| 3.1.   | Absolute Maximum Rating.....             | 8  |
| 3.1.1. | Typical Operation Conditions.....        | 9  |
| 3.1.2. | Current Consumption .....                | 9  |
| 3.1.3. | Backlight Driving Conditions.....        | 10 |
| 3.2.   | Power Sequence .....                     | 11 |
| 3.3.   | Timing Characteristics .....             | 13 |
| 3.3.1. | AC Electrical Characteristics.....       | 13 |
| 3.3.2. | Input Clock and Data Timing Diagram..... | 13 |
| 3.3.3. | Timing                                   | 14 |
| 3.3.4. | Data Input Format.....                   | 15 |
| 4.     | Optical Specifications.....              | 16 |
| 5.     | Mechanical Drawing .....                 | 17 |

# 1. General Specifications

| No. | Item                        | Specification                  | Remark |
|-----|-----------------------------|--------------------------------|--------|
| 1   | LCD size                    | 10.1 inch(Diagonal)            |        |
| 2   | Driver element              | a-Si TFT active matrix         |        |
| 3   | Resolution                  | 1024(H) X 600(V) (RGB)         |        |
| 4   | Display mode                | Normally White, Transmissive   |        |
| 5   | Pixel pitch                 | 0.2175(H) X 0.2088(V) X RGB mm |        |
| 6   | Active area                 | 222.72(H) X 125.28(V) mm       |        |
| 7   | Outline dimensions          | 235(H) X 143(V) X 5.0(D) mm    |        |
| 8   | Surface treatment           | Anti-Glare                     |        |
| 9   | Color arrangement           | RGB-stripe                     |        |
| 10  | Interface                   | TTL-24BIT                      |        |
| 11  | Backlight Power consumption | TBD                            |        |
| 12  | Panel Power consumption     | TBD                            |        |
| 13  | Weight                      | TBD                            |        |

## 2. Pin Assignment

FPC Connector is used for the module electronics interface. The recommended model is FH12A-50S-0.5SH manufactured by Hirose.

| Pin No. | Symbol           | I/O | Function                         | Remark |
|---------|------------------|-----|----------------------------------|--------|
| 1       | LED+             | P   | Power for LED backlight(anode)   |        |
| 2       | LED+             | P   | Power for LED backlight(anode)   |        |
| 3       | LED-             | P   | Power for LED backlight(Cathode) |        |
| 4       | LED-             | P   | Power for LED backlight(Cathode) |        |
| 5       | GND              | P   | Power ground                     |        |
| 6       | V <sub>COM</sub> | I   | Common voltage                   |        |
| 7       | DVDD             | P   | Power for Digital Circuit        |        |
| 8       | MODE             | I   | DE/SYNC mode select              | Note 1 |
| 9       | DE               | I   | Data Input Enable                |        |
| 10      | VS               | I   | Vertical Sync Input              |        |
| 11      | HS               | I   | Horizontal Sync Input            |        |
| 12      | B7               | I   | Blue data(MSB)                   |        |
| 13      | B6               | I   | Blue data                        |        |
| 14      | B5               | I   | Blue data                        |        |
| 15      | B4               | I   | Blue data                        |        |
| 16      | B3               | I   | Blue data                        |        |
| 17      | B2               | I   | Blue data                        |        |
| 18      | B1               | I   | Blue data                        | Note 2 |
| 19      | B0               | I   | Blue data(LSB)                   | Note 2 |
| 20      | G7               | I   | Green data(MSB)                  |        |
| 21      | G6               | I   | Green data                       |        |
| 22      | G5               | I   | Green data                       |        |
| 23      | G4               | I   | Green data                       |        |
| 24      | G3               | I   | Green data                       |        |
| 25      | G2               | I   | Green data                       |        |
| 26      | G1               | I   | Green data                       | Note 2 |

|    |                  |   |                          |          |
|----|------------------|---|--------------------------|----------|
| 27 | G0               | I | Green data(LSB)          | Note 2   |
| 28 | R7               | I | Red data(MSB)            |          |
| 29 | R6               | I | Red data                 |          |
| 30 | R5               | I | Red data                 |          |
| 31 | R4               | I | Red data                 |          |
| 32 | R3               | I | Red data                 |          |
| 33 | R2               | I | Red data                 |          |
| 34 | R1               | I | Red data                 | Note 2   |
| 35 | R0               | I | Red data(LSB)            | Note 2   |
| 36 | GND              | P | Power Ground             |          |
| 37 | DCLK             | I | Sample clock             | Note 3   |
| 38 | GND              | P | Power Ground             |          |
| 39 | L/R              | I | Left / right selection   | Note 4,5 |
| 40 | U/D              | I | Up/down selection        | Note 4,5 |
| 41 | V <sub>GH</sub>  | P | Gate ON Voltage          |          |
| 42 | V <sub>GL</sub>  | P | Gate OFF Voltage         |          |
| 43 | AV <sub>DD</sub> | P | Power for Analog Circuit |          |
| 44 | RESET            | I | Global reset pin.        | Note 6   |
| 45 | NC               | - | No connection            |          |
| 46 | V <sub>COM</sub> | I | Common Voltage           |          |
| 47 | DITHB            | I | Dithering function       | Note 7   |
| 48 | GND              | P | Power Ground             |          |
| 49 | NC               | - | No connection            |          |
| 50 | NC               | - | No connection            |          |

I: input, O: output, P: Power

Note 1: DE/SYNC mode select. Normally pull high.

When select DE mode, MODE="1", VS and HS must pull high.

When select SYNC mode, MODE="0", DE must be grounded.


Note 2: When input 18 bits RGB data, the two low bits of R,G and B data must be grounded.

Note 3: Data shall be latched at the falling edge of DCLK.

Note 4: Selection of scanning mode

| Setting of scan control input |                  | Scanning direction        |
|-------------------------------|------------------|---------------------------|
| U/D                           | L/R              |                           |
| GND                           | DV <sub>DD</sub> | Up to down, left to right |
| DV <sub>DD</sub>              | GND              | Down to up, right to left |
| GND                           | GND              | Up to down, right to left |
| DV <sub>DD</sub>              | DV <sub>DD</sub> | Down to up, left to right |

Note 5: Definition of scanning direction.  
Refer to the figure as below:

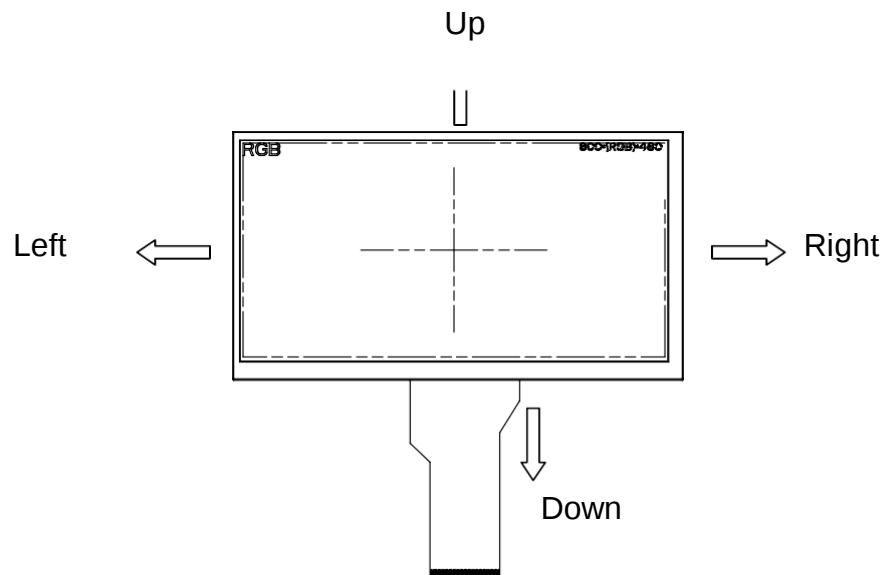

Note 6: Global reset pin. Active low to enter reset state. Suggest to connect with an RC reset circuit for stability. Normally pull high.

Note 7: Dithering function enable control, normally pull high.  
When DITHB="1", Disable internal dithering function,  
When DITHB="0", Enable internal dithering function,

### 3. Operation Specifications

#### 3.1. Absolute Maximum Ratings

(Note 1)

| Item                  | Symbol                           | Values |      | Unit | Remark |
|-----------------------|----------------------------------|--------|------|------|--------|
|                       |                                  | Min.   | Max. |      |        |
| Power voltage         | DV <sub>DD</sub>                 | -0.3   | 5.0  | V    |        |
|                       | AV <sub>DD</sub>                 | -0.5   | 15   | V    |        |
|                       | V <sub>GH</sub>                  | -0.3   | 40.0 | V    |        |
|                       | V <sub>GL</sub>                  | -20.0  | 0.3  | V    |        |
|                       | V <sub>GH</sub> -V <sub>GL</sub> | -      | 40.0 | V    |        |
| Operation Temperature | T <sub>OP</sub>                  | -20    | 55   | ℃    |        |
| Storage Temperature   | T <sub>ST</sub>                  | -20    | 60   | ℃    |        |

Note 1: The absolute maximum rating values of this product are not allowed to be exceeded at any times. Should a module be used with any of the absolute maximum ratings exceeded, the characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

### 3.1.1. Typical Operation Conditions

( Note 1)

| Item                 | Symbol           | Values |      |      | Unit | Remark |
|----------------------|------------------|--------|------|------|------|--------|
|                      |                  | Min.   | Typ. | Max. |      |        |
| Power voltage        | DV <sub>DD</sub> | 3.0    | 3.3  | 3.6  | V    |        |
|                      | AV <sub>DD</sub> | 9.5    | 10.0 | 10.5 | V    |        |
|                      | V <sub>GH</sub>  | 14     | 15   | 16   | V    |        |
|                      | V <sub>GL</sub>  | -10    | -9   | -8   | V    |        |
| Input signal voltage | V <sub>COM</sub> | 3.8    | 4.0  | 4.2  | V    |        |

Note 1: Be sure to apply DV<sub>DD</sub> and V<sub>GL</sub> to the LCD first, and then apply V<sub>GH</sub>.


Note 2: DV<sub>DD</sub> setting should match the signals output voltage (refer to Note 3) of customer's system board.

### 3.1.2. Current Consumption

| Item               | Symbol            | Values |      |      | Unit | Remark                  |
|--------------------|-------------------|--------|------|------|------|-------------------------|
|                    |                   | Min.   | Typ. | Max. |      |                         |
| Current for Driver | I <sub>GH</sub>   | -      | 0.5  | 5.5  | mA   | V <sub>GH</sub> =15V    |
|                    | I <sub>GL</sub>   | -      | 4.8  | 9.8  | mA   | V <sub>GL</sub> =-9.0V  |
|                    | IDV <sub>DD</sub> | -      | 17.9 | 22.9 | mA   | V <sub>DD</sub> =3.3V   |
|                    | IAV <sub>DD</sub> | -      | 29.1 | 34.1 | mA   | AV <sub>DD</sub> =10.0V |

3.1.3. Backlight Driving Conditions (24 White Chips)

| Parameter                                 | Symbol | Min.   | Typ. | Max. | Unit              | Note   |
|-------------------------------------------|--------|--------|------|------|-------------------|--------|
| Supply voltage of white LED backlight     | VL     | 8.7    | 9.6  | 10.5 | V                 | Note 1 |
| Current for LED backlight                 | IL     | 120    | 160  | 200  | mA                |        |
| Luminance<br>(on the module surface,BM-7) |        | 100    | 150  | -    | cd/m <sup>2</sup> |        |
| LED life time                             | -      | 50,000 | -    | -    | Hr                | Note 2 |

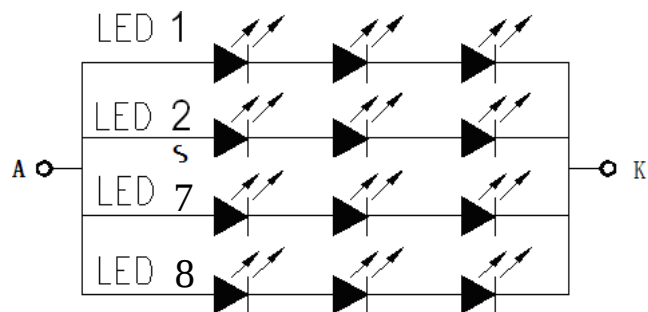


## 3.2. Power Sequence


To prevent the device damage from latch up, the power on/off sequence shown below must be followed.

Power on: VDD, GND → AVDD, AGND → V1 to V14

Power off: V1 to V14 → AVDD, AGND → VDD, GND

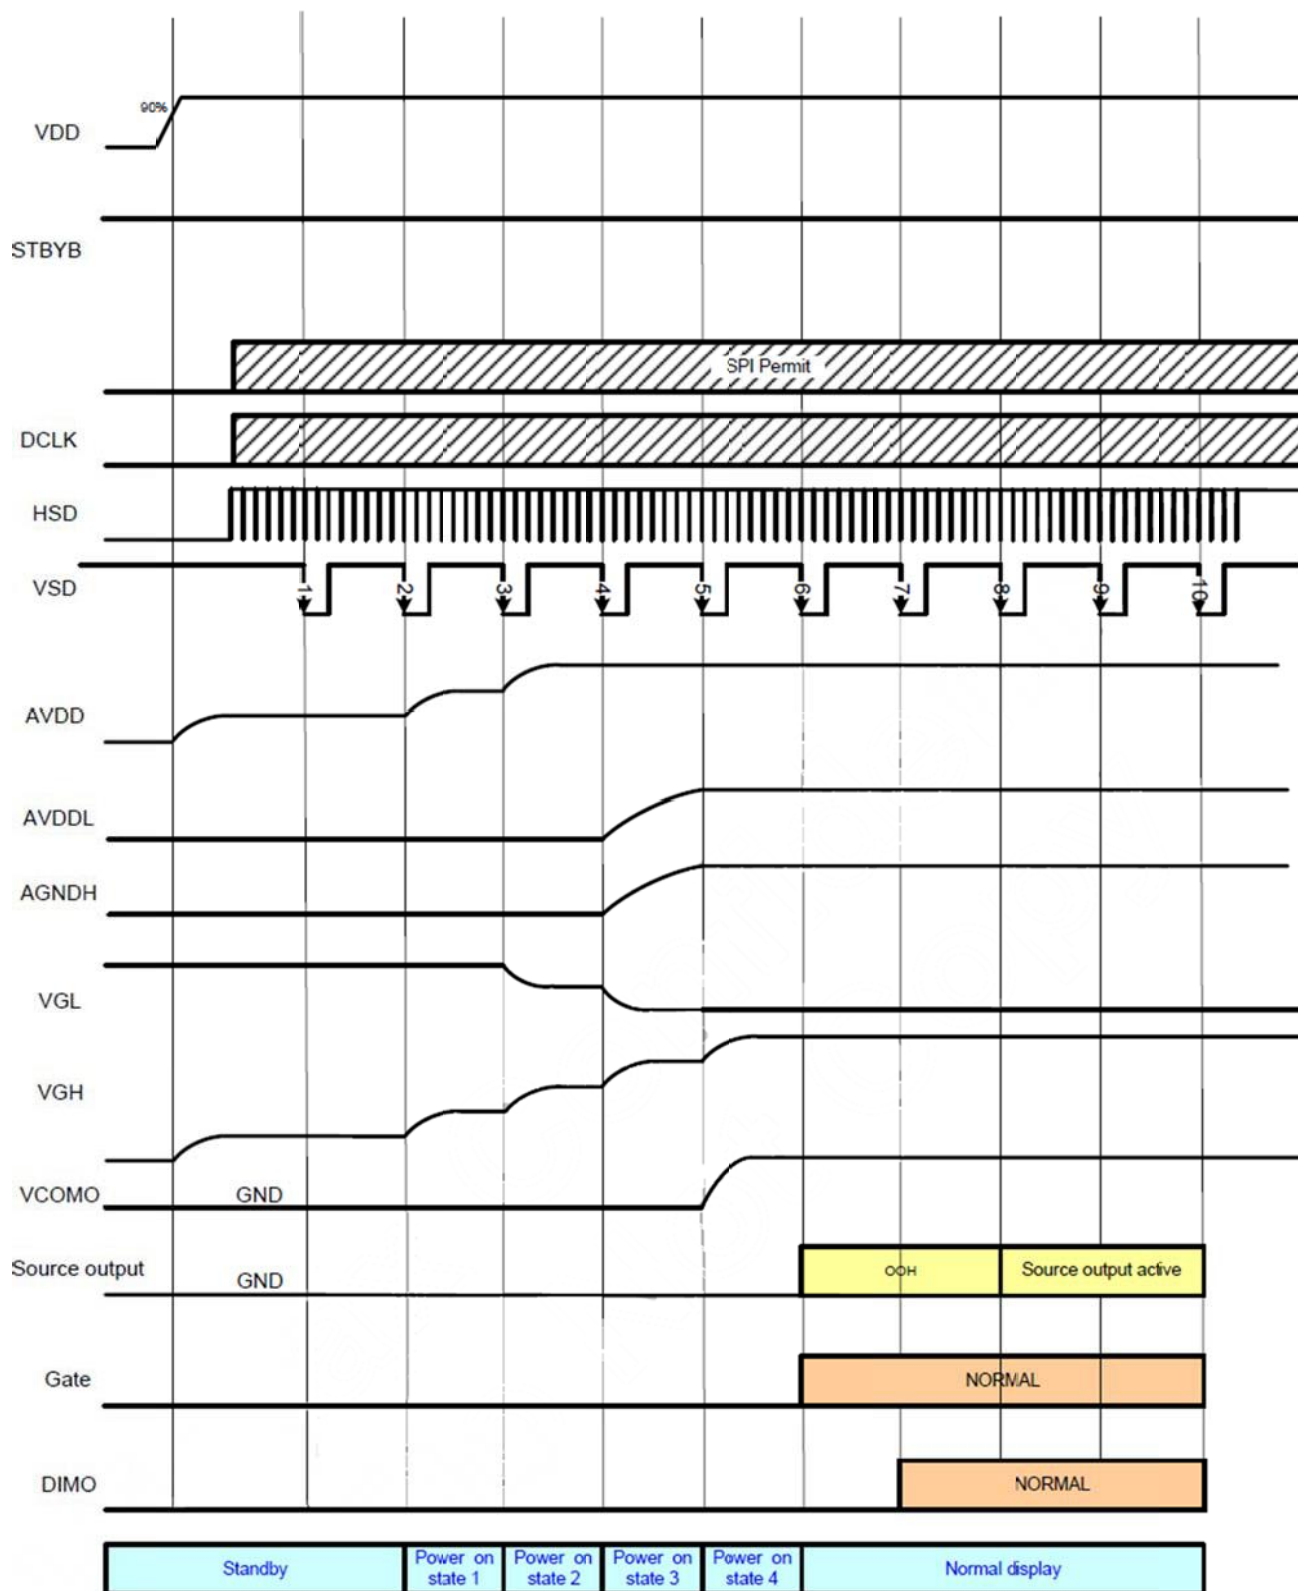

Power on timing sequence

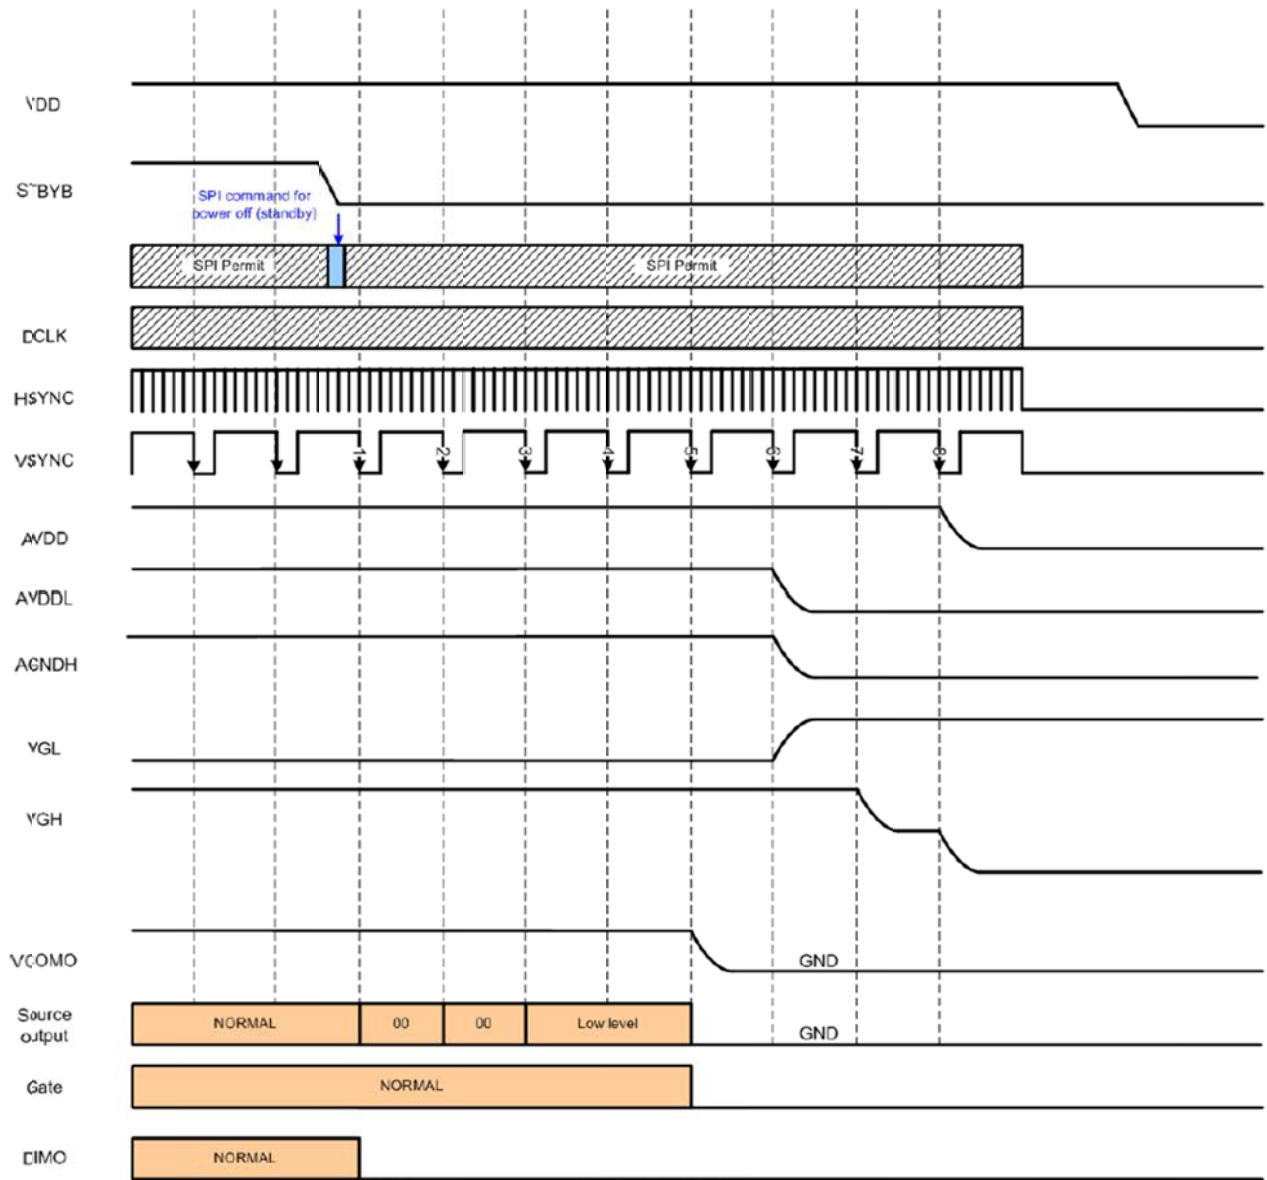

Power off timing sequence

Note: Low level=3FH, when NBW=L (Normally white)


Low level=00H, when NBW=H (Normally black)

### 3.3. Timing Characteristics

#### 3.3.1. AC Electrical Characteristics

| Parameter              | Symbol    | Spec. |      |      | Unit | Condition                                             |
|------------------------|-----------|-------|------|------|------|-------------------------------------------------------|
|                        |           | Min.  | Typ. | Max. |      |                                                       |
| VDD Power On Slew rate | $T_{POR}$ | -     | -    | 20   | ms   | From 0V to 90% VDD                                    |
| GRB pulse width        | $T_{Rst}$ | 50    | -    | -    | us   | DCLK=65MHz                                            |
| DCLK cycle time        | $T_{cph}$ | 14    | -    | -    | ns   |                                                       |
| DCLK pulse duty        | $T_{cwh}$ | 40    | 50   | 60   | %    |                                                       |
| VSD setup time         | $T_{vst}$ | 5     | -    | -    | ns   |                                                       |
| VSD hold time          | $T_{vhd}$ | 5     | -    | -    | ns   |                                                       |
| HSD setup time         | $T_{hst}$ | 5     | -    | -    | ns   |                                                       |
| HSD hold time          | $T_{hhd}$ | 5     | -    | -    | ns   |                                                       |
| Data set-up time       | $T_{dsu}$ | 5     | -    | -    | ns   | D0[7:0], D1[7:0], D2[7:0] to DCLK                     |
| Data hold time         | $T_{dhd}$ | 5     | -    | -    | ns   | D0[7:0], D1[7:0], D2[7:0] to DCLK                     |
| DE setup time          | $T_{esu}$ | 5     | -    | -    | ns   |                                                       |
| DE hold time           | $T_{ehd}$ | 5     | -    | -    | ns   |                                                       |
| Output stable time     | $T_{sst}$ | -     | -    | 6    | us   | 10% to 90% target voltage.CL=90pF, R=10K ohm(Cascade) |
|                        |           |       |      | 3    |      | Dual gate                                             |

#### 3.3.2. Input Clock and Data Timing Diagram

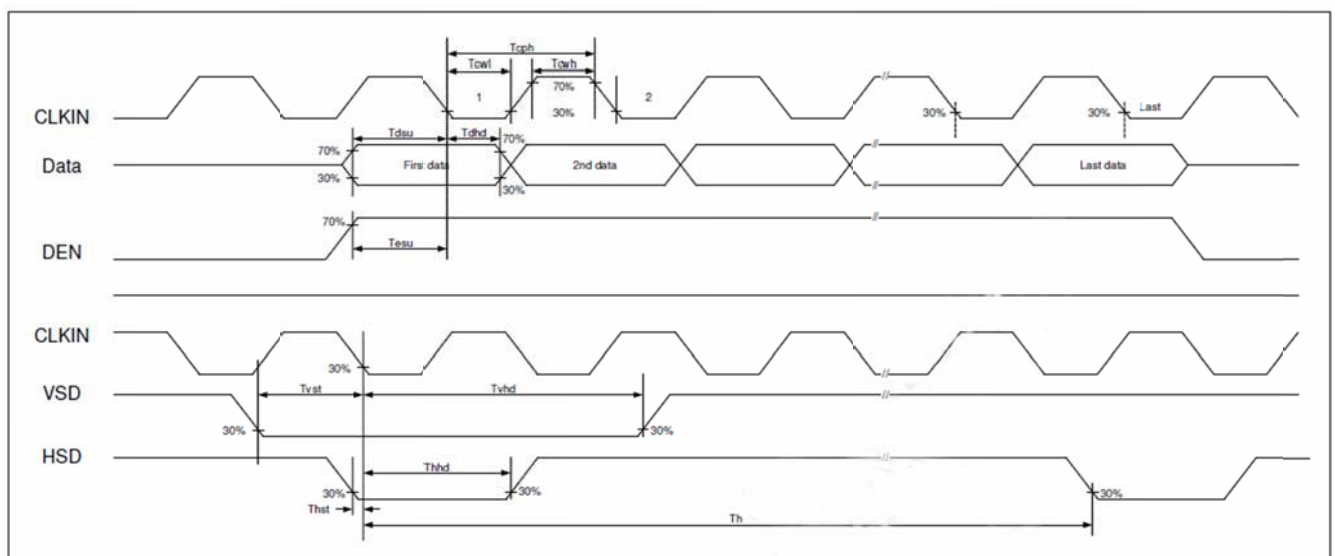

### 3.3.3. Timing

#### DE mode

| Parameter               | Symbol     | Spec. |      |      | Unit |
|-------------------------|------------|-------|------|------|------|
|                         |            | Min.  | Typ. | Max. |      |
| DCLK Frequency          | fclk       | 40.8  | 51.2 | 67.2 | MHz  |
| Horizontal Display Area | thd        | 1024  |      |      | DCLK |
| HSD Period              | th         | 1114  | 1344 | 1400 | DCLK |
| HSD Blanking            | thb+ thfp  | 90    | 320  | 376  | DCLK |
| Vertical Display Area   | tvd        | 600   |      |      | TH   |
| VSD Period              | tv         | 610   | 635  | 800  | TH   |
| VSD Blanking            | tvbp+ tvfp | 10    | 35   | 200  | TH   |

#### HV mode

##### Horizontal timing


| Parameter               | Symbol | Spec. |      |      | Unit |
|-------------------------|--------|-------|------|------|------|
|                         |        | Min.  | Typ. | Max. |      |
| DCLK Frequency          | fclk   | 44.9  | 51.2 | 63   | MHz  |
| Horizontal Display Area | thd    | 1024  |      |      | DCLK |
| HSD Period              | th     | 1200  | 1344 | 1400 | DCLK |
| HSD Pulse Width         | thpw   | 1     | -    | 140  | DCLK |
| HSD Back Porch          | thbp   | 160   |      |      | DCLK |
| HSD Front Porch         | thfp   | 16    | 160  | 216  | DCLK |

##### Vertical Timing


| Parameter             | Symbol | Spec. |      |      | Unit |
|-----------------------|--------|-------|------|------|------|
|                       |        | Min.  | Typ. | Max. |      |
| Vertical Display Area | tvd    | 600   |      |      | TH   |
| VSD Period            | tv     | 624   | 635  | 750  | TH   |
| VSD Pulse Width       | tvpw   | 1     | -    | 20   | TH   |
| VSD Back Porch        | tvbp   | 23    |      |      | TH   |
| VSD Front Porch       | tvfp   | 1     | 12   | 127  | TH   |

3.3.4. Data Input Format

Vertical Timing

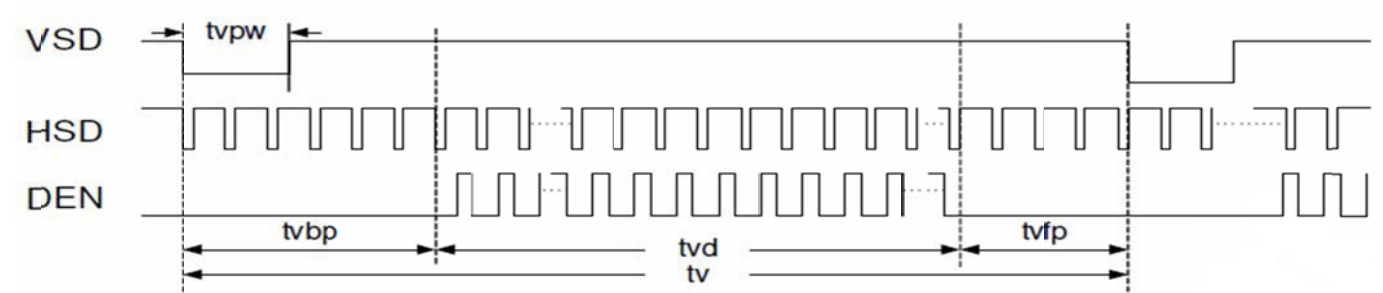

Horizontal Timing

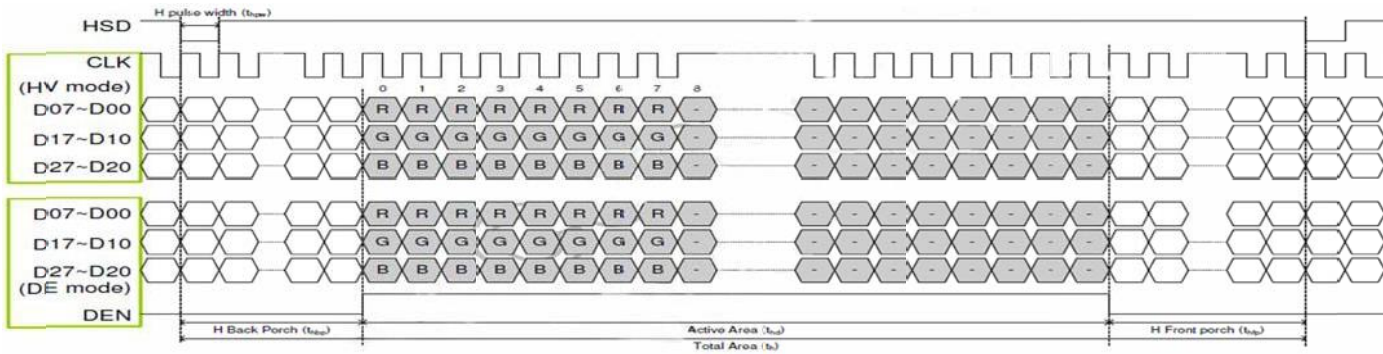

## 4. Optical Specifications

| Item           |       | Symbol                            | Condition       | Min   | Typ   | Max   | Unit              | Remark                  |
|----------------|-------|-----------------------------------|-----------------|-------|-------|-------|-------------------|-------------------------|
| View Angles    |       | θT                                | CRH10           | 60    | 70    | --    | Degree            | Note1                   |
|                |       | θB                                |                 | 40    | 50    | --    |                   |                         |
|                |       | θL                                |                 | 60    | 70    | --    |                   |                         |
|                |       | θR                                |                 | 60    | 70    | --    |                   |                         |
| Contrast Ratio |       | CR                                | ≥e              | 500   | 600   | --    |                   | Note4                   |
| Response Time  |       | T <sub>ON</sub> +T <sub>OFF</sub> | 25℃             | --    | 8     | --    | ms                | Note3                   |
| Chromaticity   | White | x                                 | Backlight is on | 0.237 | 0.277 | 0.317 |                   | Note2<br>Note5<br>Note6 |
|                |       | y                                 |                 | 0.266 | 0.306 | 0.346 |                   |                         |
|                | Red   | x                                 |                 | 0.550 | 0.590 | 0.630 |                   |                         |
|                |       | y                                 |                 | 0.300 | 0.340 | 0.380 |                   |                         |
|                | Green | x                                 |                 | 0.301 | 0.341 | 0.381 |                   |                         |
|                |       | y                                 |                 | 0.554 | 0.594 | 0.634 |                   |                         |
|                | Blue  | x                                 |                 | 0.117 | 0.157 | 0.197 |                   |                         |
|                |       | y                                 |                 | 0.075 | 0.115 | 0.155 |                   |                         |
| Uniformity     |       | U                                 |                 | 70    | 80    | --    | %                 | Note7                   |
| NTSC           |       |                                   |                 | --    | 50    | --    | %                 |                         |
| Luminance      |       | L                                 |                 | 100   | 150   | --    | cd/m <sup>2</sup> | Note6                   |

Test Conditions:

1.  $DV_{DD}=3.3V$ ,  $I_L = 160mA$ (Backlight current),the ambient temperature is 25℃.
2. The test systems refer to Note 2.

# 5. Mechanical Drawing

▼ All Rights Reserved

17/17

REV .A

